

vCam Inspection Products



Inspect and Locate with speed, accuracy and confidence with vCam Inspection Products



vCam-6 HD Inspection Camera System

Increase productivity and profitability with the feature-rich vCam-6 HD inspection camera system. Built tough and reliable for everyday use, the versatile vCam-6 is a good fit for plumbers, contractors, home inspectors, building maintenance supervisors, or anyone looking to inspect the interior of a pipe or duct.

Create crisp, detailed HD video inspections with audio comments, text descriptions, footage, date, and timestamps to submit to your customers without worry.

Designed for ease-of-use and engineered for dependability, the vCam-6 ensures trouble-free operation with little down time.



- 1080p HD resolution
- 9.7"/24cm LCD
- Touch-screen LCD
- 1 TB Hard drive
- AC/DC operation
- 3-frequency sonde
- Internal microphone
- Built-in wi-fi (free app)
- All stainless-steel





TYPE-CP "STANDARD" REEL

- Wide enough profile to roll without rocking and tipping and slim enough to go through doorways and gateways.
- The all stainless-steel construction reel is available with 200'/60M, 300'/90M or 400'/120M of standard size pushrod.
- Three frequency sonde and traceable pushrod.



TYPE-MX MINI REEL

- Small enough profile for use in confined areas or roof tops.
- Stainless steel and carbon fiber construction.
- Available in 100'/30M or 150'/45M of mini size pushrod.
- Three frequency sonde and traceable pushrod.

	Standard Type-CP	Reel HD Cameras	Mini Type-MX Reel Cameras		
Camera Model:		0			
Model:	D34-HD	D46-HD	D18-MX	D26-MX	
Dimensions:	1.3" / 34mm diameter	1.8" / 46mm diameter	0.70" / 18mm diameter	1" / 26mm diameter	
Pipe Range:	2" / 50mm to 6" / 150mm	3" / 75mm to 8" / 200mm	2" / 50mm to 3" / 76mm	3" / 76mm to 6" / 152mm	
Construction:	Stainless-steel housing with sapphire lens		Stainless-steel housing with sapphire lens		
Warranty:	1 year standard warranty Camera exchange program is available		1 year standard warranty Camera exchange program is available		

vCamMX-2 Mini Camera System



The versatile **vCamMX-2 mini-camera system** is a compact all-in-one inspection camera at an affordable price. Available in 100'/30m and 150'/45m pushrod lengths and with two sizes of user changeable cameras ,the system can inspect lines from 2"/50mm to 4"/100mm.

The vCamMX-2 mini-camera has all the features of the larger pushrod camera systems such as locatable sonde, traceable pushrod, distance counter, internal rechargeable batteries, on-screen text writer and built-in microphone for adding audio comments.

The vCamMX-2 can be purchased as a complete all-in-one unit with the control module mounted to the reel or purchase the reel separately to use with the vCam-6 control module.



vCam Live View Mobile is an app that connects a smartphone or tablet to the vCam-6 or vCamMX-2 control modules via Wi-Fi and streams live video into the app. With this video stream the user can record video and capture JPEG pictures into the smartphone or tablet. Now the user can share these files using the sharing features built into the phone/tablets operating system. Record video in HD quality on the smartphone or tablet.



- Add text to the vCamMX-2 screen
- · Add text to recording video or pictures
- Rename files
- Switch between HD and SD video stream
- Edit files in the phones/tablets operating system
- Share via iOS sharing features (email, text message, DropBox, OneDrive)





vLoc3-Cam Sonde and Camera Locator

The **vLoc3-Cam** is the easiest to use sonde locator on the market today. The omni-directional antenna array allows for approaching the sonde from any position. The directional arrows will guide the user first to the front or rear locate point and then directly to the sondes's position and read out the depth of cover to the sonde.

With multiple sonde frequencies it is compatible with the major push cameras and crawler cameras on the market. The Pushrod Trace mode shows a second display geared for tracing the path of the pushrod deployed in the pipe or tracing pipes with an optional portable transmitter.



vCam Accessories



Rotate and Tilt Table

The Rotate and Tilt Table (RATT) - mounts between the Type-CP reel and the vCam-5 or vCam-6 HD control module. The RATT adds flexibility to position the control module to a comfortable viewing angle.

Available for: vCam-5 and vCam-6 to use on the Type-CP Reel



Reel Drip Bags - use the durable, nylon material drip bags when entering a building, home or other clean areas. Use the drip bags to ensure that any moisture or debris will not fall from the reels pushrod onto a clean surface.

Available for: Type-CP and Type-MX Reels



74.0

13.1

Locate the pushrod

Directional arrows point to the sonde

or buried utilities

location

Camera Skid Range

Model	D18-MX	D26-MX	D34 Series	D34-HD	D46 Series			
2.25"/57mm Guide Skid								
Pipe Range: 4" (100mm)	•	•	•	•	-			
3"/75mm Guide Skid								
Pipe Range: 4" (100mm)	-	•	•	•	-			
4"/100mm Guide Skid								
Pipe Range: 6" (150mm)	-	-	•	•	•			
D46-CP 5"/127mm Guide Skid								
Pipe Range: 6" (150mm)	-	-	-	-	•			
Type-B Adjustable Skid								
Pipe Range: 10"/255mm to 16"/405mm Optional Light Kit Skid minimum diameter: 8"/200mm Skid minimum length: 11"/270mm Skid maximum diameter: 12"/305mm Skid maximum length: 10"/255mm	-	-	•	•	•			

^{* &}quot; ● " = compatible accessory

^{* &}quot;-- " = not compatible

Vivax-Metrotech Ltd.


Unit 1, B/C Polden Business Centre, Bristol Road, Bridgwater, Somerset, TA6 4AW, UK

Tel: +44(0)1793 822679 Email: SalesUK@vxmt.com

Vivax Canada Inc.

41 Courtland Ave Unit 8, Vaughan, ON L4K 3T3, Canada

Tel: +1-289-846-3010 Fax: +1-905-752-0214 Email: SalesCA@vxmt.com

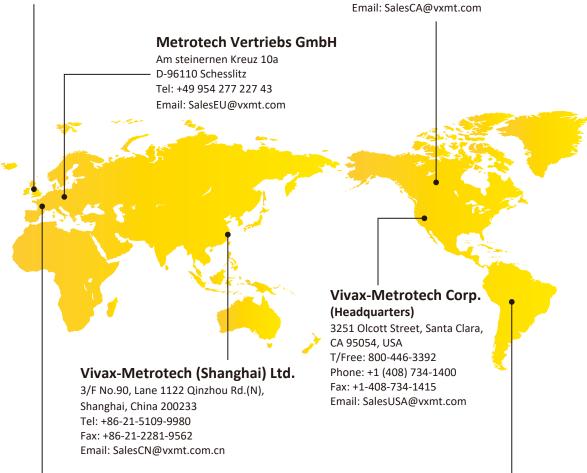

Vivax-Metrotech SAS

Technoparc - 1 allée du Moulin Berger,

69130 Ecully, France Tel: +33 (0)472 53 03 03 Fax: +33 (0)472 53 03 13 Email: SalesFR@vxmt.com

Ventas para América Latina

3251 Olcott Street, Santa Clara, CA 95054, USA

T/Free: 800-446-3392 Tel: +1-408-734-1400 Fax: +1-408-743-5597 Email: LatinSales@vxmt.com

Local Vivax-Metrotech Distributor:

CONNECT WITH US ON SOCIAL MEDIA











